

Lotos 4" & 6" Round

Downlight 5CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	Finish
R4ERDR	W	9CS 2700K/3000K/3500K /4000K/5000K - 90	725	WT White

Example: **R4ERDR-W9CS-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The wafer-thin Lotos LED Recessed Kit with remote driver combines high quality light output and efficiency while eliminating the need for a large housing. This innovative design can be installed easily as a remodel or new construction with an optional frame-in kit sold separately. Lotos is available in a downlight version for general ambient lighting and an adjustable version with a gimbal that pivots 360 degrees on a hinge. Now available with 5-CCT options.

FEATURES

- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K /4000K/5000K
Input:	120 -277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-5% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens




FINISHES:



White

LINE DRAWING:

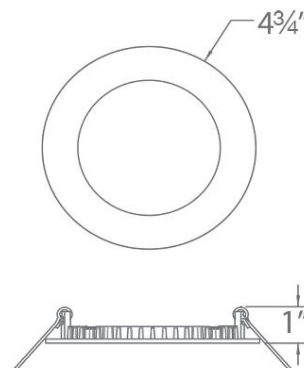

Lotos 4" & 6" Round

Downlight 5CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	Finish
R6ERDR	W	9CS 2700K/3000K/3500K /4000K/5000K - 90	1200	WT White

Example: **R6ERDR-W9CS-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The wafer-thin Lotos LED Recessed Kit with remote driver combines high quality light output and efficiency while eliminating the need for a large housing. This innovative design can be installed easily as a remodel or new construction with an optional frame-in kit sold separately. Lotos is available in a downlight version for general ambient lighting and an adjustable version with a gimbal that pivots 360 degrees on a hinge. Now available with 5-CCT options.

FEATURES

- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K /4000K/5000K
Input:	120 -277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-5% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens



FINISHES:



White

LINE DRAWING:

